ALL BENDS TO BE QQ155-10-

2885588-10 (REF)

2885588-11 (REF)

AN442-D4
QQ-A-355 .030

2885588-8 (REF)

2885588-6 (REF)

AN315-D6R

2885184-6

2885184-15

2885184-7

DRILL #10
C'SINK 82° × .414 ±.010

NOTE
THIS PIECES INVERTED

TYPICAL WHERE RODS PASS THRU

AN442-D5

2885184-14

2885184-8

CUT HOLE IN -7 (REF) AS SHOWN

2885588-7 (REF)

2885588-9 (REF)

LOCK

AFT

2885184-12

2885184-18

SPOTWELD -6 TO -7 AS SHOWN ℄ APPROX 1" SPACING

STENCIL BLACK ENAMEL LETTERS (1/2 INCH) AS SHOWN HERE & UP ABOVE ON THIS SIDE

AN3DD5
AN310D3
AC380C2-2

2885588-12 (REF)

END-7 (REF)

AN505-D6-7
AC365-D632 RUBBER CEMENT 2885594 TO -6
PUSH SCREWS THRU RUBBER GASKET AND FASTEN NUT ON TOP SIDE OF -6
SCREWS SPACED 2" (APPROX)

2885588-13 (REF)

AN510-D10-16
AC365D1032

NOTE: THIS PART TO BE USED ON SHIPS # 2486, 2487 & 2488 ONLY

NOTE
USE TYPE "D" RIVETS ONLY

⅄ SPOTWELDING SYMBOL
THIS SYMBOL INDICATES SPOTWELDING. RIVETS ARE NOT INDICATED ON THIS DRAWING BY SYMBOLS.

2885564-10 (REF)

DRILL FOR 1/4 BOLT

-6 REF

-7 (REF)

2885594

HOLD THIS DIM


AN4-DD12
AN310D4
AN380C2-2

9 SEE DETAIL

NOTE
INSIDE RADII TO BE 1/8 UNLESS OTHERWISE SHOWN

SECTION A-A

AN442-D4

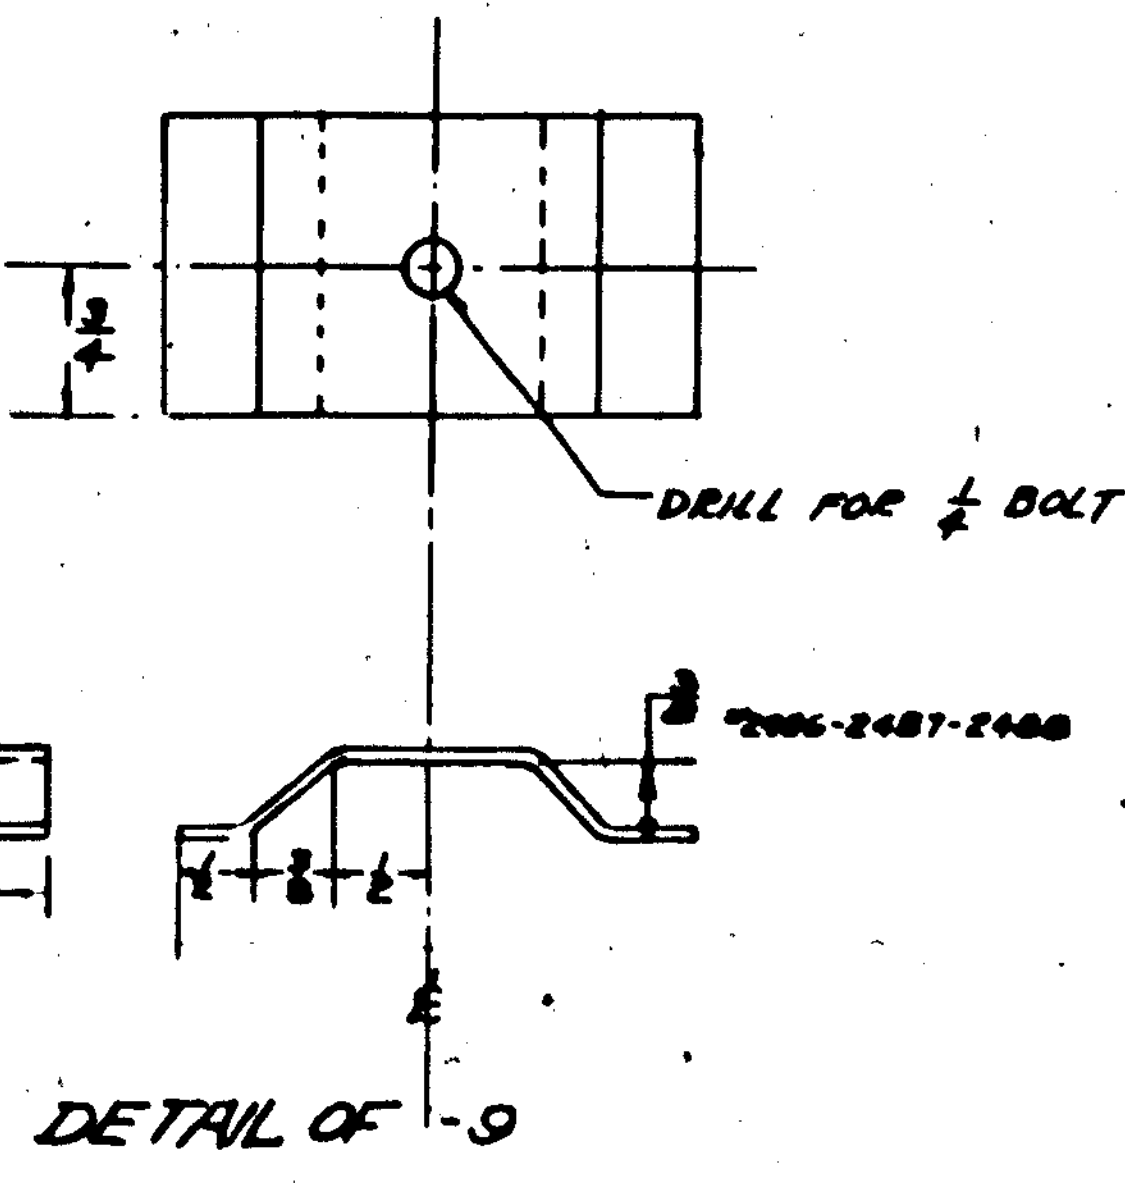

DETAIL OF -9

E.O.C. 2661 PBY-5
E.O. A15576

PART No.	STOCK	MATERIAL	SPEC
-9	.064 × 1 3/8 × 1 1/8	ALCLAD	24ST
-8	.064 × 2 × 1/2		
-7	.040 × 12 × 20		
-6	.064 × 20 × 32	ALCLAD	24ST

PARTS LIST FOR ASSY.

PBY-5A MODEL

REQUIREMENTS FOR AIRPLANE: 20

SCALE: FULL

[redacted]

A C
NAVY: None
HEAT TREAT
FINISH: Z-P-AP

NAME: DOOR-VERTICAL CAMERA

OPP HAND: NONE

J 2885565

CONSOLIDATED AIRCRAFT CORP. SAN DIEGO, CALIF.

H-151